


## Mid-Size Rough Terrain

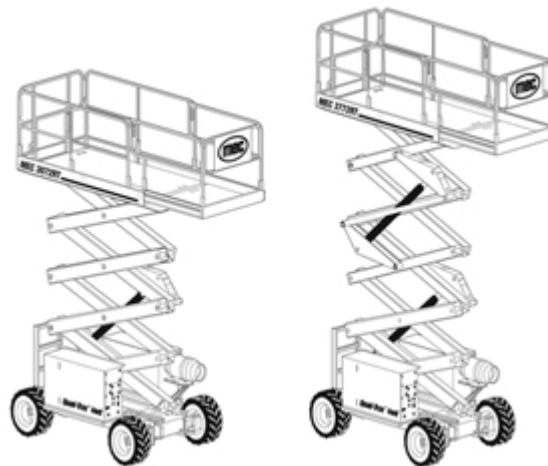

### Standard Features:

- Fully proportional drive and lift controls
- Unique combination of wide beams and large pins, in self-lubricating bearings, creates a larger load bearing surface in scissor pivot areas.
- The 400 lb. capacity roll-out, deck extension can be locked at increments or extended to full 48".
- Steering controller is mounted at the top of the joystick for easy one-handed operation.
- Adjustable mount allows the controller to be positioned for maximum operator comfort.
- All mechanical and electrical
- Sheet loading entrance accommodates 48" wide material.
- Fold-down guardrail system.
- Hour meter.
- 110V power to platform.
- High torque power package.
- Ground controls at base.
- Dual automatic parking brake.
- Multi-axis tilt sensor.
- Powder coat finish.
- Multiple disc brakes.
- Manual brake release.
- Dual fuel power (gas and LP).
- Liquid cooled engine.
- Lifting lugs.
- U.S. patent #5,476,050.

- components are easily accessible without raising the platform or swinging out trays.
- Components are logically grouped and wiring is numbered for easy reference.
- Canadian patent #2,115,870.
- Other patents pending.
- Absolute best value

**Optional Features:**

- Quad-Trax 4wd allows operators to conquer extreme terrain conditions.
- Auto-Leveling outriggers.
- Platform work lights.
- All motion alarm.
- Flashing beacon (continuous).
- Air line to platform.
- Automotive horn.
- 120V 2250W generator.
- Lanyard attachments (6).
- Platform swing gate.
- Removable upper control station.
- Additional LPG tank.
- Diesel engine.
- Non-marking RT tires.
- Foam filled tires.
- Turf tires.
- CSA compliant options.
- 1 year extended warranty.
- 2 year extended warranty.

Detailed Specs	3072RT		3772RT	
	U.S.	Metric	U.S.	Metric
<b>Height:</b>				
Working Height*	36 ft	11.14 m	43 ft	13.28 m
Platform Height	30 ft	9.14 m	37 ft	11.28 m
Max. Drive Height	30 ft	9.14 m	37 ft	11.28 m
Stowed Height (top guardrail)	108.5 in	2.75 m	106.75 in	2.63 m
Stowed Height (rails folded)	78.75 in	2.00 m	77 in	1.95 m
Guardrail Height	43.5 in	1.10 m	43.5 in	1.10 m
Toeboard Height	6.0 in	15 cm	6.0 in	15 cm
Ground Clearance	8.4 in	21.3 cm	8.4 in	21.3 cm
<b>Dimensions:</b>				
Length (stowed overall)	117.25 in	2.98 m	117.25 in	2.98 m
Width	72 in	1.83 m	72 in	1.83 m
Platform Length (extended)	158 in	4.01 m	158 in	4.01 m
Roll-out Deck Length	48 in	1.22 m	48 in	1.22 m
Wheelbase	86 in	2.18 m	86 in	2.18 m
Lift Capacity	1,000 lbs	454 kg	750 lbs	340 kg
Roll-out Deck capacity	400 lbs	181 kg	400 lbs	181 kg
<b>Speeds:</b>				
Raise/Lower Speed	26/28 sec	26/28 sec	32/38 sec	32/38 sec
Drive Speed (stowed)	4.0 mph	6.4 km/h	4.0 mph	6.4 km/h
Drive Speed (raised)	0.4 mph	0.6 km/h	0.4 mph	0.6 km/h
<b>Performance:</b>				
Gradeability	45%	45%	40%	40%
Turning Radius (inside)	73.25 in	1.86 m	73.25 in	1.86 m
Turning Radius (outside)	14 ft 2.5 in	4.33 m	14 ft 2.5 in	4.33 m
Weight (approx.**)	7,340 lbs	3329 kg	8,500 lbs	3856 kg
<b>Brakes</b>	Multiple disc brakes, dual rear wheel			
<b>Power Source</b>	Liquid cooled - gas/LP			
<b>Controls</b>	Proportional drive and lift controls			
<b>Tires</b>	26 X 12 D / 380 NHS			

\*Metric equivalent of working height adds 2m to platform. U.S. adds 6 ft. to platform height.

\*\*Weight may increase with certain options or configurations.

**Meets requirements of ANSI A92.6-2006 & CSA B354.2-01.**  
*Specifications subject to change without notice.*