

TM12 vertical mast specifications

TM12 VERTICAL MAST

| | |
|-------------------------------|---|
| max. working height A | 18ft. |
| max. platform height B | 12ft. |
| max. drive height | 12ft. |
| platform capacity (SWL) | 500lb. |
| platform size (inside) | 29in. x 41in. |
| width C | 30in. |
| stowed height D | 64.75in. |
| stowed length E | 53.5in. |
| gross weight | 1,710lb. |
| drive speed - max. | 2.27mph |
| with platform raised | 0.62mph |
| gradeability | 14° / 25% |
| inside turning radius | 14.4in. |
| ground clearance | 3in. |
| lift speed - raise/lower | 18 sec/25 sec |
| drive system | dual front hydraulic motors |
| tires | 12in dia. solid rubber, non-marking |
| battery charger | 90V - 240V - 25 amp automatic |
| parking brake | 2 wheel, spring-applied, hydraulically-released with manual overdrive |
| control system | one-hand proportional controls |
| power source | 24V 4hp DC electric motor 4-220 Ah batteries |

DANGER: Models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energized conductors which is pointed out on decals and placards attached to the machine. Only qualified and trained operators are to be authorized to use and operate a work platform. Aerial work platforms must be elevated only on firm, level surface. Products in this brochure comply with applicable ANSI Standards. This literature is for illustrative purposes only. Consult Operating Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice or obligation.

The Snorkel TM12 provides a safe, efficient means of working at height in restricted spaces typically encountered in offices, retail stores, hotels, public buildings or crowded industrial aisles. Its compact size also makes it ideal for applications such as stock picking and record storage retrieval. Operators simply step onto the platform, drive to the work location and elevate to the desired height. When the job is complete, the lift can be quickly lowered and returned to a convenient storage area.




B.P1. TM12 USA 12/07

standard features

- Proportional controls
- Drives at full height
- 24V DC 4hp electric motor provides clean, pollution-free power for indoor use
- Descent and tilt alarms
- High amp hour rating gives long usage between charges
- 25 amp charger for easy overnight re-charging
- Emergency lowering at chassis controls
- Non-marking, solid rubber tires
- D-ring tie down points
- Selectable motion alarm
- 1 year parts and labor warranty
- 4 years structural warranty

options

- Overload alarm
- Special paint colors
- Environmental green oil

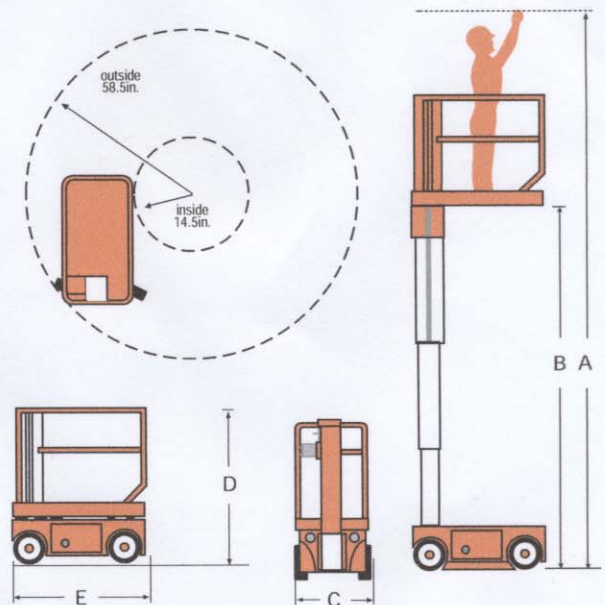

Snorkel PO Box 1160, St. Joseph, MO 64502-1160, USA
Tel: +1 (785) 989-3000 **Toll Free:** +1 (800) 255-0317
Sales fax: +1 (785) 989-3070 **Parts fax:** +1 (785) 989-3077
www.snorkelusa.com

Meets or exceeds applicable requirements of OSHA, ANSI A92.6 and CSA B354.1-04
 This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
Snorkel
 INTERNATIONAL